



The Canon image FORMULA DR-M1060 departmental scanner is a compact scanner equipped with a U-turn path, and is the smallest scanner in its class. It is capable of scanning A3 documents despite its desktop-scanner size, making it a cost-effective answer to your diverse scanning needs.

Comfortable and versatile

Despite its compact desktop-scanner size, the DR-M1060 is capable of scanning A3 documents. Its unique U-turn path design allows documents to be fed and ejected from the front of the scanner for convenient and efficient front-side only scanning operations. The U-turn path can be switched to a straight path for plastic cards, thick paper, and other types of documents that cannot be bent, expanding the variety of media that can be scanned.

High-performance scanning, built to last

The DR-M1060 scanner offers a collection of invaluable image capturing and processing functions for various document types that optimise readability and minimise reprocessing. The scanner is also equipped with advanced error detection functions that not only allow smooth recovery from errors, but also prevent damage to documents by quickly detecting abnormal document movement All these features are designed to optimise workflows and improve productivity, delivering a reliable, efficient, and streamlined solution to all your document digitization needs.

Rapid scanning

	Simplex (ppm)		Duplex (ipm)	
	B/W	Colour	B/W	Colour
A4 (landscape)	60	60	120	120
A4 (portrait)	40	40	80	80
А3	30	30	60	60

(At 200dpi)

Selectable U-turn and straight path options




for plain paper documents

Innovative space-saving design



Conventional model



DR-M1060




for thick paper documents/cards

Reliable feeding performance

The DR-M1060 is the first in the DR-series to be equipped with paper speed and skew sensors adjacent to the rollers. These sensors monitor the paper speed and skew angle as the document moves during scanning, enabling the unit to stop the document feeder immediately a problem is detected and to prevent damage to the document.



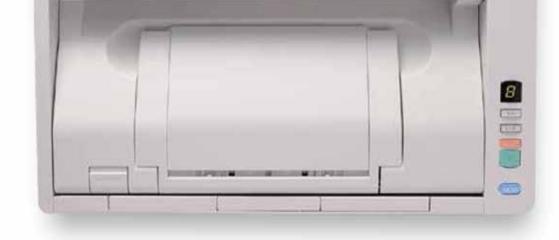

Support for a wide variety of media formats





A3 / 11x17











Postcard Envelope Plastic Card Business Card

User-friendly operating panel

The operating panel for basic operations, such as starting and stopping scans, is located on the front right of the scanner. The panel includes a DFR button to allow smooth recovery from feed stops that occur due to double feed. Up to nine jobs can be registered by connecting to the bundled CaptureOnTouch software.

High-quality image processing

Batch Separation Using a Blank Sheet

For batch separation, insert a blank sheet. This will be recognised as a batch separator, and the file will be automatically divided.







Text Enhancement







Original

Folio Mode







Scanned

Colour dropout/enhancement










Image with red drop-out set (red filtered)

MultiStream[™]



Skip Blank Page



Auto Size Detection









Documents of different sizes

Document size is detected and adjusted

Deskew







Skewed Images

Deskewed Images

Prevent bleed through/ remove background









Text enhancement (off)

Text Orientation Detection







On

Bundled Software

Capture Perfect

CapturePerfect is Canon's own scanning application designed to make scanning more efficient. The application is equipped with a user-friendly interface, support for a wide range of file formats, and a variety of functions for effectively using scanned data, such as creation of searchable and secure PDFs and Scan to Mail.

Capture OnTouch)

CaptureOnTouch, the dedicated software supplied with DR-series scanners, is a convenient tool that allows you to choose the most appropriate scanning method for your needs. Up to nine routine scan tasks can be registered as jobs, which can be accessed directly from the scanner's operating panel.

Options

Barcode module / 2D code module

These software modules allow barcode or 2D code recognition using the scanner driver. The 2D code module supports a variety of 2D code types including QR code.

Flatbed unit

A flatbed scanner unit can be connected to and used with the DR-M1060 scanner. The flatbed unit allows you to scan bound documents such as passports that are not supported on standard automatic document feeders, expanding possible applications.

Specifications

Туре	Desktop sheet-fed scanner	
Scanning document size	Plain Paper: Width: 50.8 mm to 300 mm (2" to 11.8") Length: 70 to 356 mm (2.76" to 14") (You can scan documents up to 3,000 mm (118.1") long by setting the scanner to the Long Document mode.) Business Card: Width: 50.8 mm to 55 mm (2" to 2.2") Length: 85 mm to 91 mm (3.4" to 3.6") Card: 54 mm x 86 mm (2.2" x 3.4") (ISO standard)	
Scanning document thickness	Plain Paper: U-turn path (page separation): 27 to 128 g/m² (0.04 mm to 0.15 mm) U-turn path (non separation): 27 to 164 g/m² (0.04 mm to 0.2 mm) Straight path: 27 to 255 g/m² (0.04 mm to 0.3 mm) Business Card: 128 to 380 g/m (0.15 mm to 0.45 mm) (Use the straight path and place vertically.) Card: 0.76 mm (0.03") or less, 1.4 mm (0.055") or less for the embossment (Use the straight path and place vertically.)	
Scanning Sensor	Contact image sensor	
Light source	LED	
Scanning side	Simplex / Duplex	
Scanning modes	Black and White, Error Diffusion, 256-level Grayscale, Advanced Text Enhancement, Advanced Text Enhancement II, 24-bit Colour	
Scanning resolution	100 x 100dpi / 150 x 150dpi / 200 x 200dpi / 240 x 240dpi / 300 x 300dpi / 400 x 400dpi / 600 x 600dpi	
Scanning speed ¹	Grayscale: 200dpi: 60 ppm (Simplex), 120 ipm (Duplex) 300dpi: 60 ppm (Simplex), 120 ipm (Duplex) Colour: 200dpi: 60 ppm (Simplex), 120 ipm (Duplex) 300dpi: 40 ppm (Simplex), 80 ipm (Duplex)	

ADF capacity (80 g/m² paper)	A4: 60 sheets A3: 25 sheets	
Interface	Hi-Speed USB 2.0	
Other functions	Prescan, Staple detection, Addon, Double feed detection ignore	
External dimensions (W x D x H)	Document tray closed: 424 mm (16.7") × 246 mm (9.7") × 120 mm (4.7") Document tray open: 424 mm (16.7") × 440 mm (17.3") × 210 mm (8.3")	
Weight (without AC adapter)	Approximately 6.1 kg (13.5 lb)	
Power supply (using AC adapter)	DC24V 1.3A	
Power consumption	Scanning: 32.5 W or less In the sleep mode: 2.5 W or less With power switch OFF: 0.5 W or less	
Noise	Not more than 56 dB	
Operating environment	Temperature: 10°C to 32.5°C (50°F to 90.5°F) Humidity: 20% to 80% RH	
Consumables	Exchange Roller Kit	

1) Actual scanning speed may vary depending on your system configuration and PC. Specifications are subject to change without notice.

 $\label{lem:microsoft} \mbox{Microsoft, Windows and SharePoint are registered trademarks of Microsoft Corporation in the United States and other countries.}$

Apple and OS X are registered trademarks of Apple Inc. in the United States and other countries.

Adobe, the Adobe logo, Acrobat, the Adobe PDF logo, and Adobe Reader are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

Other product and company names herein may be the trademarks of their respective owners.









Other software



eCopy® PDF Pro Office

eCopy PDF Pro Office

eCopy PDF Pro Office instantly creates 100% industry-standard, universally viewable PDF files, and converts static PDF documents into editable files. eCopy PDF Pro Office enables the flexibility of a universal document format for higher productivity and seamless information exchange.



Kofax Virtual Rescan Basic

The leading image processing software, Kofax VRS Basic, improves readability for multi-size documents of varying degrees of quality. Automatically straighten skewed pages without character degradation, optimise a document's brightness and contrast levels, and eliminate background noise and speckling.

canon.com.au/business
Follow us on Twitter @CanonBusinessAU
1800 444 199

2935-v1-07/14



achieve more. beyond technology.